


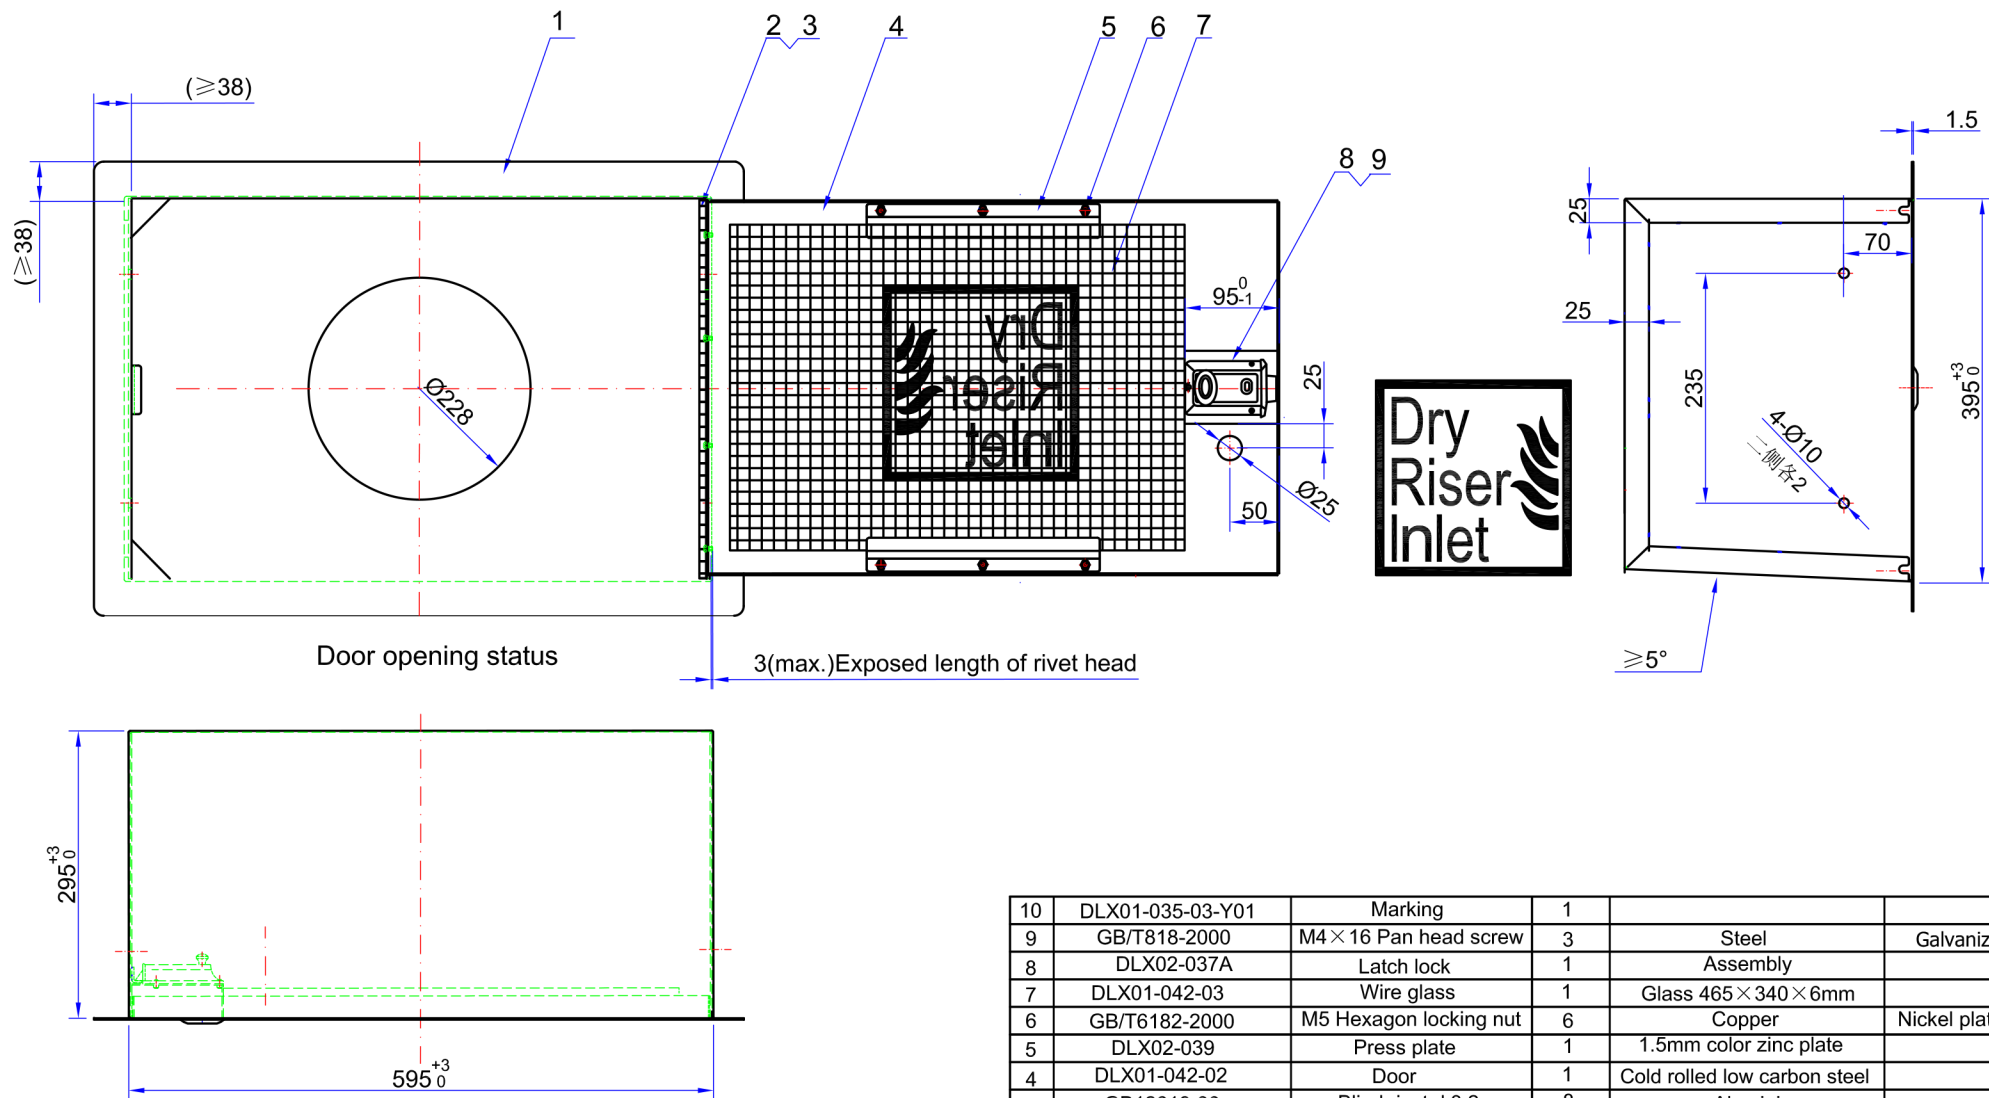

Technical Requirements:

1. Cabinet shell and door is connected with hinges and the door and hinges are connected through using d3.2 blind rivets(per picture shown);
2. When the cabinet is locked in close, the door shall be flush with cabinet; and the door opening angle shall be more than 180° ;
3. When there is no key to open and in urgent use, just break the wire glass and directly open the latch lock by hand from inside.

10	DLX01-035-03-Y01	Marking	1		
9	GB/T818-2000	M4 $\times$ 16 Pan head screw	3	Steel	Galvanized
8	DLX02-037A	Latch lock	1	Assembly	
7	DLX01-042-03	Wire glass	1	Glass 465 $\times$ 340 $\times$ 6mm	
6	GB/T6182-2000	M5 Hexagon locking nut	6	Copper	Nickel plating
5	DLX02-039	Press plate	1	1.5mm color zinc plate	
4	DLX01-042-02	Door	1	Cold rolled low carbon steel	
3	GB12618-90	Blind rivet d 3.2	8	Aluminium	
2	DLX02-040	Hinge	1	SUS304	
1	DLX01-042-01	Cabinet shell	1	Cold rolled low carbon steel	Galvanized
No.	Drawing No.	Name	Q'TY	Material	Remark
				395 $\times$ 595 $\times$ 295	Code No.
				Fire Cabinet	HC010
					W.T. ~14.5Kg Scale
Zone	Revision note	Date	Signature	Assembly	
Drawn			Audit		
Checked			Approved		
				Hydrotech	