
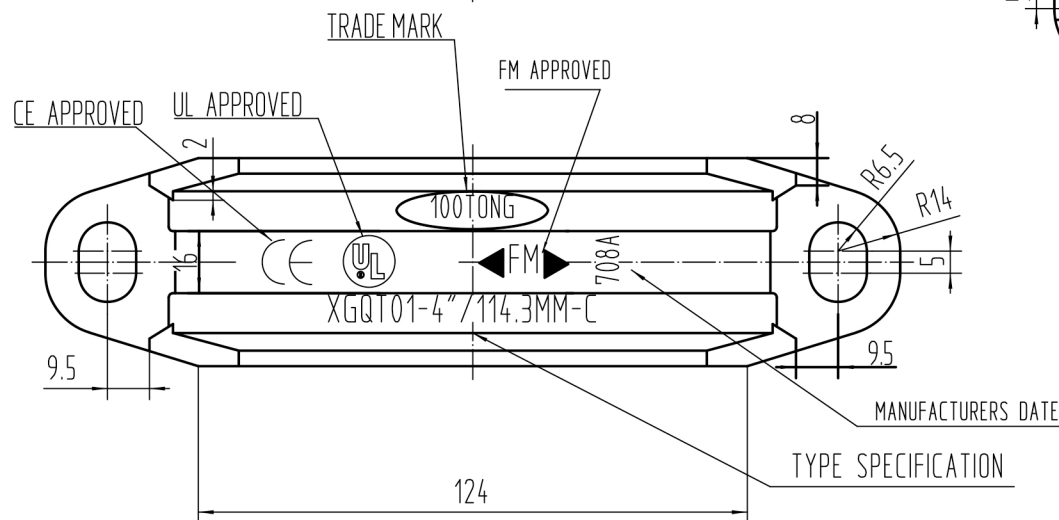
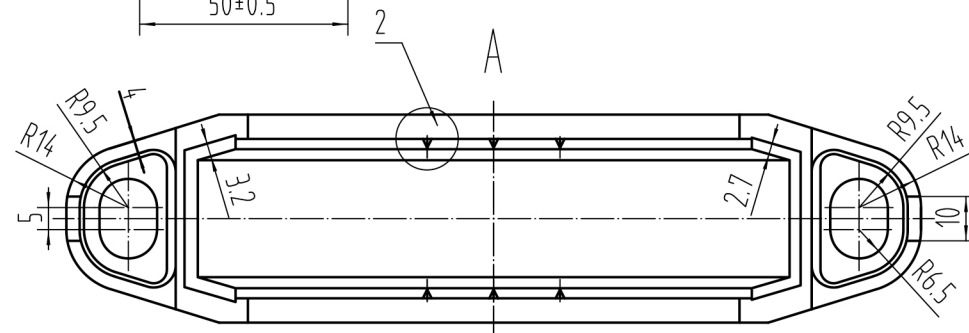
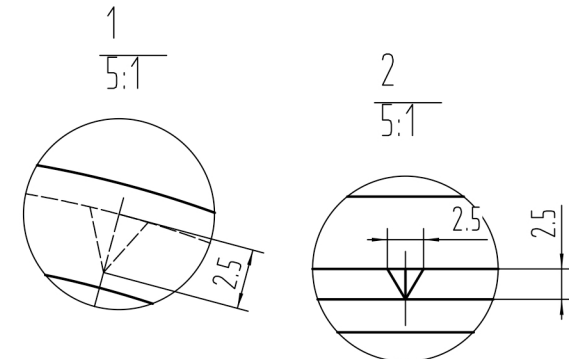
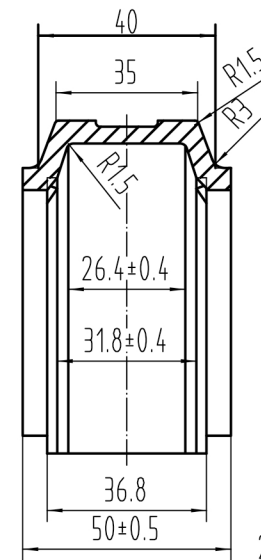


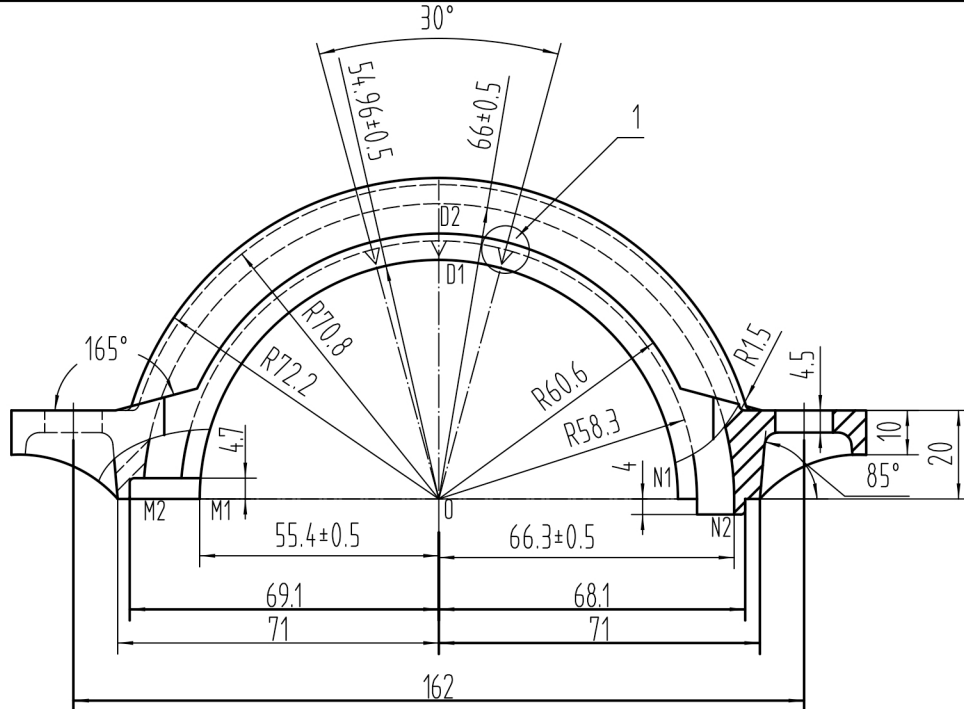

TECHNICAL REQUIREMENT

- UNLESS OTHERWISE SPECIFIED CASTING R1-R2.
- NO MARKING THE TOLERANCE CLASS OF CASTING SIZE CT8, IMPLEMENTATION STANDARD GB/T6414-1999.
- NO MARKING THE TOLERANCE CLASS OF PROCESSING SIZE c, IMPLEMENTATION STANDARD GB/T1804-2000.
- CASTING SURFACE IS FREE FROM CRACK, DEPRESSION AND OTHER DEFLECTIONS.
- CASTING SURFACE SHOULD BE CLEAN AND SMOOTH.
- ALL THE MARKS SHOULD BE CLEAR ENOUGH TO RECOGNIZE.
- CASTING SURFACE SMOOTH CONDITION: $\sqrt{3.2}$
- THE PRODUCT APPEARANCE ADOPTS TECHNIQS OF UNATTACKALTE ELECTROSTATIC PAINTING AND THE COATING IS EPOXY WITH GOOD ADHESION.
- THE COATING THICKNESS: 0.1-0.2MM
- DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

DRAWING NO.	01-114
VERSION NUMBER	A

				DRAWING	王延君
				DESIGN	王尧昆
				FIRST CHECK	王振峰
				SECOND CHECK	周立国
NO.	MARK	CORRECTION RECORD	SIGNATURE/DATE	APPROVAL	陈仁军

RIGID COUPLING

SPECIFICATION	TYPE
4"	XGQT01

Hydrotech

MATERIAL	PRESSURE	AMOUNT	N.W	SCALE	PAGE
GB/T1348-2009 QT450-10	2.5MPa	1	1.329kg	FULL ALL	1